

A&G MANUFACTURING CO., INC.

YOUR SOURCE FOR QUALITY, SERVICE AND EFFICIENT BUYING.

PHONE 978-587-2859

WWW.AGMFG.NET

1-888-367-8227

EMT AND RIGID COMBINATION CONDUIT BODIES WITH COVERS AND GASKETS- LR TYPE

FEATURES

- COMBINATION LR TYPE WITH COVER AND GASKET
- NPT TAPERED HUBS
- SUITABLE FOR USE IN CONCRETE
- NEMA FB 1 RATED FOR WET LOCATIONS USE WITH THREADED RIGID METAL CONDUIT ONLY

APPLICATION


- PROVIDES ACCESS TO CONDUCTORS FOR PULLING, SPLICING AND MAINTENANCE

STANDARD MATERIAL

- COPPER FREE ALUMINUM DIE CAST
- COVER - STAMPED STEEL
- GASKET - NEOPRENE RUBBER

STANDARD FINISH

- POWDER COAT

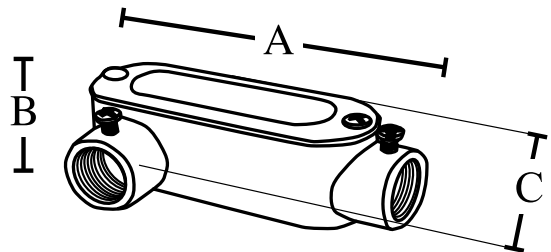

PART #	UPC#	SIZE	MAX NUMBER	MAX SIZE	UNIT CARTON	SHIP CASE	WEIGHT CASE	INCHES		
								A	B	C
DLR50	00070	1/2"	1	6 AWG	10	100	30	4.56	1.31	2.06
DLR75	00071	3/4"	2	6 AWG	10	50	20	5.31	1.62	2.23
DLR100	00072	1"	3	6 AWG	5	25	16	6.25	1.88	2.50
DLR125	00073	1-1/4"	3	2 AWG	2	10	12	8.22	2.50	3.40
DLR150	00074	1-1/2"	3	2 AWG	2	10	12	8.22	2.67	3.48
DLR200	00075	2"	3	2/0 AWG	2	10	9	10.48	3.29	4.07

978-587-2859

WWW.AGMFG.NET

1-888-367-8227